

# USB Dual Band Card Register Reader

(125Khz & 13.56Mhz)

**AR-725-R**

Quick Register User Card with **SOYAL** 701Client Software



- USB HID: Driver free, just Plug and Play
- Support WIN XP, WIN 7, WIN10
- Suitable for 701Client quick card registration procedure (Support 701ClientSQL version 2019 May and after)



USB



Quickly Read  
Card Number



Support  
Dual-Band



LED indicator


# USB

# Dual Band(125Khz & 13.56Mhz) Card Register Reader

## Specifications USB Dual Band Card Register Reader AR-725-R

Power Supply	5VDC
Frequency	125kHz & 13.56MHZ
Power consumption	<0.5W
Interface	USB 2.0 Virtual COM Port HID
Power Supply Mode	Powered by USB/ DC 5V
Temperature	-20 ° C to +65 ° C
Applicable Card Types	EM 125K Mifare DESFire Ultra Light
Color	Black
Housing Material	ABS (Soft Touch Finish)
Dimension(mm)	110(L)X79(W)X26(H)
Weight(g)	230±10

## Dimension

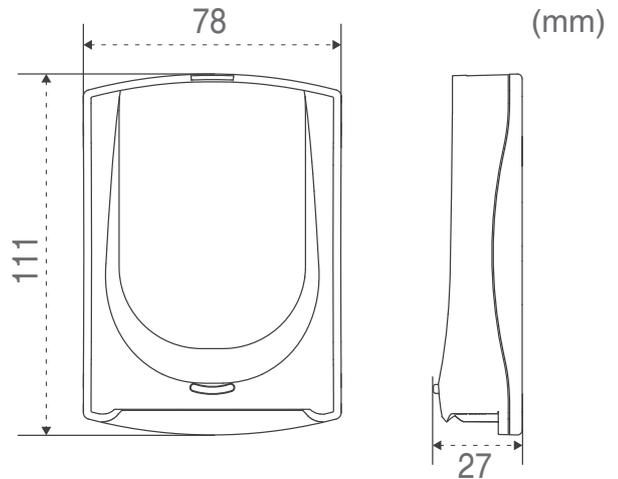

## Features




### ► USB HID: Driver free, just Plug and Play

USB Card Reader (AR-725-R) support just Plug and Play, the simplest way to operate, no installation or driver needed.

## Quick Start

### STEP 1

Plug in USB Card Reader (AR-725-R) into the USB port of your PC

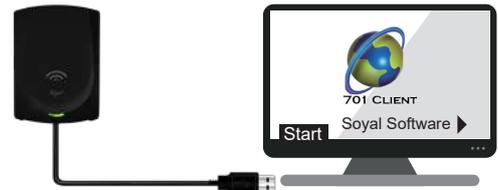

### STEP 2

Run 701 Client software and go to option [8 User Cards Edit]



### STEP 3

Place the card into AR-725-R and it will automatically adding card number into the Card UID field

If placing the next card into AR-725-R, 701Client will jump into the next user, that way adding card number for big batch is much more easier using AR-725-R (Moreover, card format shows in 701 Client will follow the original card format (ABA/ WG 34/ WG 26/ HEX) no need to convert it.



\*Note:  
1. "Lock" option must be untick  
2. Untick [Auto Save Card ID]  
3. When swiping the card, 701Client will automatically saved data in software, please download user data to controller afterwards

### ► Support WIN XP, WIN 7, WIN10


Support most of operating system in the market, increase users' convenient.



### ► Quick Register User Card with SOYAL 701Client Softwar

(Support software version 701 Client Ver 9.01 and above)

In 701 Client when configuring user's data, with USB Card Reader (AR-725-R) adding card number will be quicker, moreover it support EM (125kHz), Mifare, Desfire, and Ultra Light card format.



701 CLIENT

**SOYAL**  
ACCESS CONTROL SYSTEM

www.soyal.com

RoHS Compliant

SOR

FC

CE

v221219

Authorized Distributor